

SOLID WALL SWFB/H HEAVY DUTY


Lintels are manufactured from minimum 4mm thick structural steel plate with a minimum yield strength of 275N/mm².

All lintels are post galvanised to a minimum zinc thickness dictated by building usage and geographical corrosivity ratings (see millennium map and lintel longevity table) to comply with BS 7543 and BS EN ISO 1461.

DURA GALV 70

DURA GALV 100

DURA GALV 140

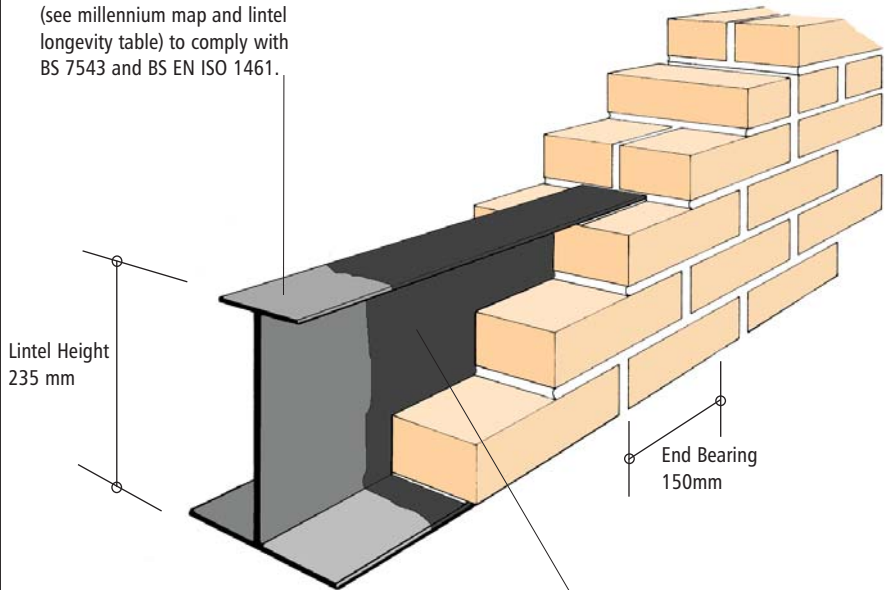

Lintel Height
235 mm

End Bearing
150mm

**DUPLEX
COATING**

Duplex paint system over post galvanised lintel, dictated by building usage and geographical corrosivity ratings (see millennium map and lintel longevity table).

PRODUCTS AND INFORMATION CAN BE AMENDED WITHOUT PRIOR CONSENT TO MAINTAIN THE COMPANY POLICY OF CONTINUED IMPROVEMENT

WHITTINGTON ROAD, OSWESTRY,
SHROPSHIRE, SY11 1HZ
TEL: 01691 653251
FAX: 01691 658222
EMAIL: techadvice@jonesofoswestry.com

JONES
OF OSWESTRY

SECTION 2 PAGE 39

GENERAL TECHNICAL DETAIL, COMPOSITION AND MANUFACTURE

GENERAL

Introduction. The SUPERLINTEL SWFB/H range of lintels, for solid wall applications, have a number of outstanding features which contribute to performance and durability characteristics which exceed BSEN 845-2:2003 recommendations.

These Features include:-

- 4mm thick structural steel plate used throughout for rigidity, long life durability and dimensional consistency.
- Optimum protection against corrosion; Lintels are hot-dip galvanised after manufacture.
- End bearings of 150mm as standard for high structural stability.
Non-standard end bearings can be supplied to order.

COMPOSITION AND MANUFACTURE

Lintels are manufactured from minimum 4mm thick steel structural plate with a minimum yield strength of 275N/mm².

All lintels are Hot Dip Galvanised after manufacture, tested in compliance with BS EN ISO 1461 for zinc coatings of steel through the controlled inhouse galvanising "DURAGALV" process. Coating thicknesses vary in accordance with the requirements of BS 7543 and local corrosion categories levels.

For "DURAGALV" coatings above 70 microns, I.E: Duragalv 100 and 140, additional controlled processes are employed to ensure the heavier coatings adhere to the "minimum 4mm" specially selected steel plate required to accept these levels of heavy coatings.

To achieve protection for all five corrosion category areas, a further "DUPLEX COATING" paint system is applied to lintels, after galvanising, in the most severe areas of corrosion levels.

LOADING RATIOS, SECTIONAL DETAIL / PROPERTIES


PERFORMANCE

Mechanics. Safe working loads for the SWFB/H range of lintels are established by testing based upon the non-destructive test procedures for steel lintels recommended in BSEN 845-2:2003.

Each load is the **total** allowable equivalent uniformly distributed load (UDL) as described in BS 5977 : Pt.1

REQUIRED FOR SPECIFYING

F - Leaf width




ALL TECHNICAL DETAILS ARE COPYRIGHT, AND MUST NOT BE REPRODUCED WITHOUT PRIOR CONSENT

SOLID WALL SWFB/H HEAVY DUTY

LOADING TABLES AND SECTIONAL PROPERTIES

PRODUCTS AND INFORMATION CAN BE AMENDED WITHOUT PRIOR CONSENT TO MAINTAIN THE COMPANY POLICY OF CONTINUED IMPROVEMENT

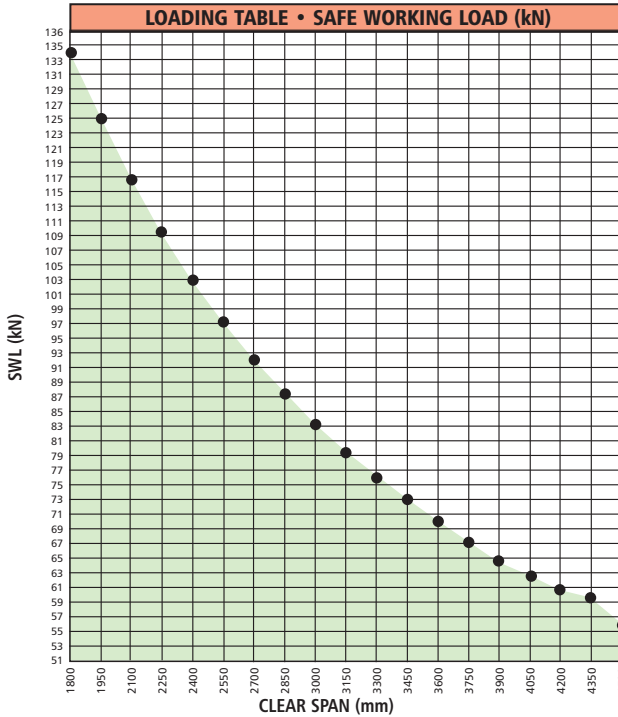

SWL			
CLEAR SPAN	(min) END BEARING	OVERALL LENGTH	SWL (kN)
1800	150	2100	134
1950	150	2250	125
2100	150	2400	117
2250	150	2550	109.5
2400	150	2700	103
2550	150	2850	97.5
2700	150	3000	92.5
2850	150	3150	87.5
3000	150	3300	83.5
3150	150	3450	79.5
3300	150	3600	76
3450	150	3750	73
3600	150	3900	70
3750	150	4050	67.5
3900	150	4200	65
4050	150	4350	62.5
4200	150	4500	60.5
4350	150	4650	60
4500	150	4800	56

SECTIONAL PROPERTIES

EXAMPLE OF SECTIONAL PROPERTIES				
SECTION REFERENCE	LEAF WIDTH (F)	LINTEL WEIGHT/M kg	Ixx cm ⁴	Zxx cm ³
SWFB/H/215	215	23.67	2343	183







ARCHED LINTEL TYPES

Arched soffit Superlintels can be designed to suit any of the solid wall lintel sections. there are 6 standard arch profiles shown, each providing full support to masonry arch shapes as drawn.

Steel flange thicknesses to lintel soffits are allowed for within a design to ensure continuity of brick coursing to outer leaf, in particular springing points at each end of lintel spans.


Where overall lintel height exceeds 450mm, webs are cropped to allow wall ties to be continued between both outer and inner leaf.

As with flat soffit Superlintels, the lintel section is dictated by wall construction, load and span. Arched forms may dictate minor changes to lintel section as shown.




ALL TECHNICAL DETAILS ARE COPYRIGHT, AND MUST NOT BE REPRODUCED WITHOUT PRIOR CONSENT

LOADING RATIOS, SECTIONAL DETAILS OF ARCHES

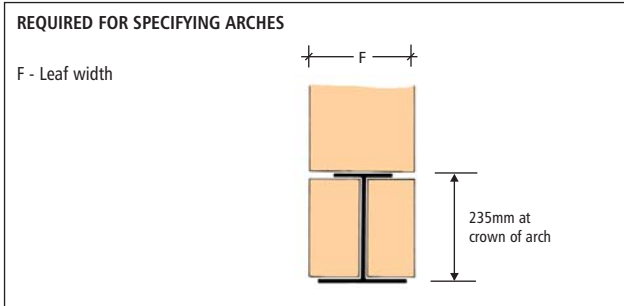

SOLID WALL SWFB/H HEAVY DUTY

TYPICAL INSTALLATION/CONSTRUCTION DETAILS

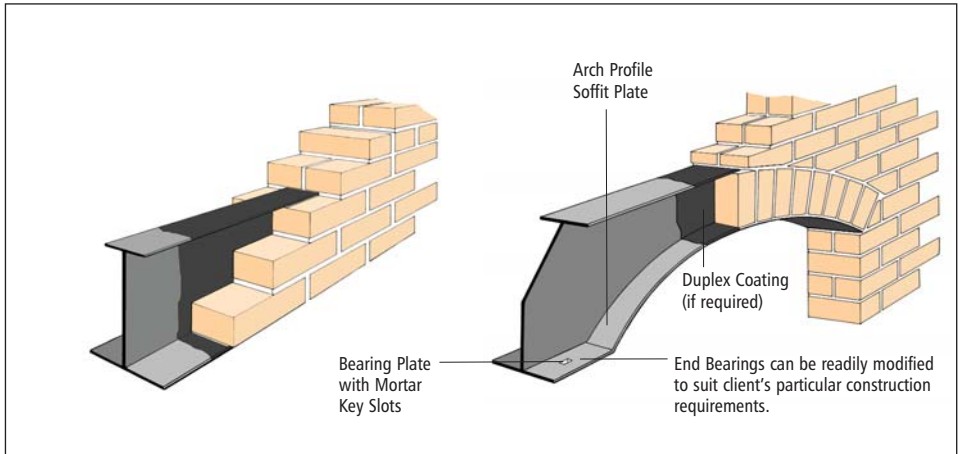

ACCESSORY SUFFIXES

To specify add the following suffixes to the professional specification code

COL Corbelled Outer Leaf

CS Concealed Soffit detail.

G Stepped outer flange (20 mm step unless stated).

JAF Moulded arch former.

JSF Superarch steel arch former.

M Phosphate etch finish to lintel soffit.

SFC Steel frame connection.

SS Stainless steel lintel


Note: Finish coating suffix code i.e. DG140 (Duragalv 140) is not required when specifying stainless steel.

U Metal lathing plaster key.

COL Accessory
Corbelled
Outer Leaf

F, required
for specifying


Steel lintel support is essential to maintain stability through the height of a cavity wall which includes corbelling to the facework.



SFC Accessory

Steel frame connection


Illustration shows one of a large number of solutions where facework is required to pass across an inner column face without brick piers interrupting below lintel soffit (e.g. continual curtain walling). Column connections can also be used to resist overturning moments where insufficient bearing resistance can be achieved by conventional build at ends of lintel.



CS Accessory
Concealed
Soffit detail

F, required
for specifying

Steel lintel support can be combined with concealed soffit undercarriage to present facework to all 3 external sides of soffit.



WHITTINGTON ROAD, OSWESTRY,
SHROPSHIRE, SY11 1HZ
TEL: 01691 653251
FAX: 01691 658222
EMAIL: techadvice@jonesofoswestry.com

JONES
OF OSWESTRY

SECTION **2** PAGE **43**

SOLID WALL

SWFB/H HEAVY DUTY

FINISHES

How to use the Lintel Longevity Table

1. Locate your site on the Millennium map (E.g. Leeds - West Yorkshire)
2. Match the corrosion category square colour to the key (Leeds = 3 light blue)
3. From the left hand column clarify required Construction Type / Minimum

- life (High quality Refurbishment = 60 years)
4. Read along from 60 years to category 3 (Minimum coating to be specified to comply with standards = Duragalv 100)
 5. At the end of the specifying code DG100 needs to be added.

Coating suffix specifying codes:

- Duragalv70 = DG70
 Duragalv100 = DG100
 Duragalv140 = DG140
 Duragalv140 +
 Duplex Coating =DG140DC

Fabricated mild steel lintel, Hot-Dip Galvanised after manufacture		= LINTEL LONGEVITY TABLE				
		Millennium Map corrosion category 1/2/3/4/5, and the minimum coatings to be specified in those areas, to comply with BS 7543 and BS EN 845-2:2003.				
See Millennium Map for your site location or visit www.hdg.org.uk/map/index.htm		1	2	3	4	5
CONSTRUCTION TYPE / MIN LIFE Retail, Industrial and General Refurb. Minimum Life to Comply With BS 7543 = 30 YEARS	DURAGALV 70	DURAGALV 70	DURAGALV 70	DURAGALV 70	DURAGALV 100	
CONSTRUCTION TYPE / MIN LIFE Health, Education, New Housing High Quality Refurb. Minimum Life to Comply With BS 7543 = 60 YEARS	DURAGALV 70	DURAGALV 70	DURAGALV 100	DURAGALV 140	DURAGALV 140 DUPLEX COATING	
CONSTRUCTION TYPE / MIN LIFE Civic and Other High Quality Buildings. Minimum Life to Comply With BS7543 = 120 YEARS	DURAGALV 70	DURAGALV 140	DURAGALV 140 DUPLEX COATING	DURAGALV 140 DUPLEX COATING	DURAGALV 140 DUPLEX COATING	

Any lintel profile can be created by our in-house design team with spans ranging from 600mm and rises to suit. Contact our advice team on techadvice@jonesofoswestry.com for online support and free design service.

ALL TECHNICAL DETAILS ARE COPYRIGHT, AND MUST NOT BE REPRODUCED WITHOUT PRIOR CONSENT

HOW TO SPECIFY

PROGRESSIONAL EXAMPLE FOR SPECIFYING								
Ref DESCRIPTION	MAIN PRODUCT CODE				THESE REQUIRED WHEN SPECIFYING ARCHES			
	WALL TYPE	LOADING	LEAF WIDTH (F)	SPAN	ARCH TYPE	ARCH RISE	ACCESSORY SUFFIX	FINISHED COATING
DETAIL	(SOLID WALL FULL BRICK)	(HEAVY)	(215mm)	(2100mm)	(A2 = SEGMENTAL)	(450mm)	(METAL LATHING KEY)	(SEE LONGEVITY TABLE)
PRODUCT Ref	SWFB	H	215	2100	A2	450	U	DG100
THE ABOVE EQUALS FULL SPECIFYING CODE OF = SWFB/H/215/2100/A2/450/U/DG100								